




www.folangsiforklift.com

ELECTRIC STACKER

电动托盘堆垛车

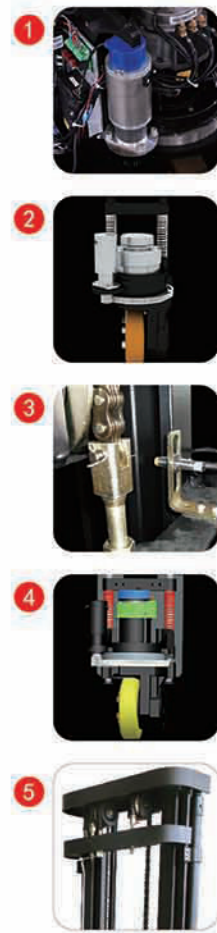

窄腿 CDD14-L/LE AC 1400 Kg

- ▶ 1.AC vertical driving motor reduces the failure rate and saves maintenance cost.
 - ▶ 2.Electronic power steering system(EPS) for flexible and light turning improves the stability of electrical system.
 - ▶ 3.Electronic reverse system guarantees operation safety,save the electric energy and protect hydraulic unit.
 - ▶ 4.Pressurized vibration damping reduces the wheel skidding problems and increases operating comfort.
 - ▶ 5.H steel mast used the cold drawing technology enhances machine structure and improves stability and security.
- ▶ 1. AC 电机，立式驱动，减少故障发生率，节约维护成本；
 - ▶ 2. 电子助力转向（EPS），转弯灵活、轻便，提高电气系统稳定性；
 - ▶ 3. 电子倒车系统，保障作业安全，节约电能，保护液压装置；
 - ▶ 4. 增压减震，减少驱动轮打滑现象，增加操作舒适度；
 - ▶ 5. H 钢门架“冷拉”工艺，强化车体结构，提高安全性和稳定性。

CDD14-LE 两级全自由型门架 (FULL FREE 2-STAGE MAST)

Mast model 门架型号	Max lift height 最大起升高度(mm)	Load capacity 额定承载力(kg)	Mast lowered height 门架缩回时整车静态高度(mm)	Max extend height 门架作业时整车最大高度(mm)	Free lift height 自由提升高度(mm)
ZM250	2500	1400	1830	3000	1270
ZM300	3000	1200	2080	3500	1520
ZM330	3300	1000	2180	3800	1620



www.folangsiforklift.com

ELECTRIC STACKER

电动托盘堆垛车




SPECIFICATION 详细说明


	Unit	CDD14-L	CDD14-LE
Feature 特性	Model 型号	980	930
	Configuration No. 配置号		
	Type 类型	Narrow legs	
	Mast type 门架类型	2-Stage STD 2-Stage Free	
	Load capacity 额定载重	kg	1400
	Load center 载荷中心距	mm	600
Wheels	Wheel base 轴距	mm	1325
	Operating type 操作类型	Walkie/Stand On	
Dimension 尺寸	Wheels type 车轮类型(前/后)	PU	
	Wheel quantity Driving wheel/Balance wheel/Bearing wheel	1/2/4	
	Standard lift height 标准门架起升高度	mm	3000
	Lowered fork height 货叉最低高度	mm	85
	WhFork size(Lengh/width/thickness) 标准货叉规格(长/宽/高)	mm	1150 (1200) /185/55
	Overall length 整车全长 踏板收起/放下	mm	2050/2470
	Overall width 车体宽度	mm	856
	Outside width between forks 货叉外侧间隙	mm	550/600/650/685
	Inside width between forks 货叉内侧间隙	mm	180/230/280/315
	Min.Turning radius 最小转弯半径 踏板收起/放下	mm	1580/1990
Performance	Min.Aisle width for pallets 800 x 1200 最小直角堆垛通道宽度	mm	2180/2580
	Min.Aisle width for pallets 1000 x 1200 最小直角堆垛通道宽度	mm	2210/2600
	Min.ground clearance 最小离地间隙	mm	30
	Travel speed,laden/unladen 最大行驶速度 满载/空载	km/h	5/5
	Lift speed,laden/unladen 最大起升速度 满载/空载	mm/s	130/230
	Travel speed,laden/unladen 最大下降速度 满载/空载	mm/s	130/230
Electrical configuration	Gradeability,laden/unladen 爬坡速度 满载/空载	%	5/7
	Drive motor/Lift motor/Steering motor 驱动电机/起升电机/转向电机	KW	AC1.5/DC3/DC 0.15
	Battery voltage 蓄电池电压	V	24
	Battery voltage/capacity 蓄电池电压/容量	Ah	280
Weight	Brake 制动	Electromagnetic/Regenerative	
	Controller 控制器型号	CURTIS	
	Battery weight 蓄电池重量	kg	235
	Service weight with battery 自重(包含蓄电池)	kg	1330 1204

DIMENSION DRAWING

外形尺寸图

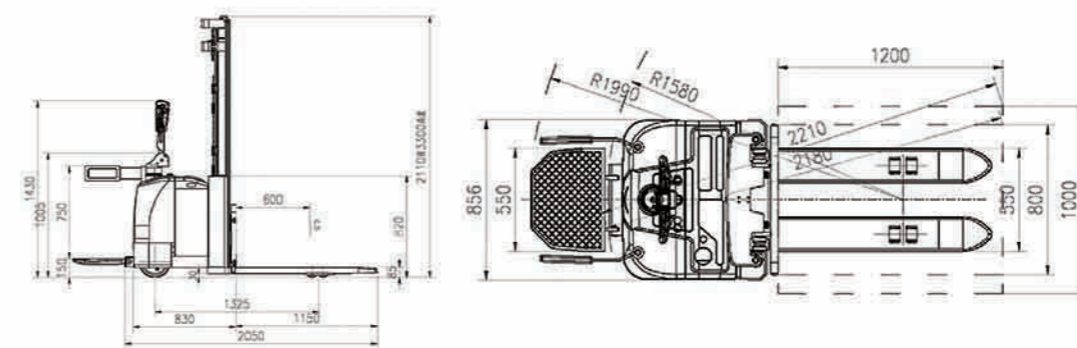

载荷曲线图
LOAD CURVE

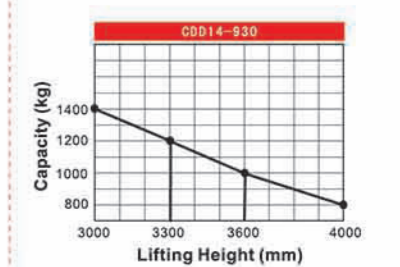

FOLANGSI MACHINE CO., LTD.

Tel.:020-39993595 Fax:020-39993597

E-mail:admin@folangsiforklift.com

